

Research Updates in Intelligent Transportation Systems

Volume 8 No. 3
1999

Transportation Management

Page 1
SCOOT Performance in Anaheim
Advanced Traffic Control System

Page 6
Intelligent Surveillance
Using Vehicle Signatures

Page 8
PATH on Paper

Page 10
PATH Presentations

Page 11
PATH Database News

Page 16
Science Center
Showcases PATH Video

PATH – Partners for Advanced Transit and Highways – is a collaboration between the California Department of Transportation (Caltrans), the University of California, other public and private academic institutions, and private industry. PATH's mission: applying advanced technology to increase highway capacity and safety, and to reduce traffic congestion, air pollution, and energy consumption.

CALIFORNIA
PATH



SCOOT Performance in Anaheim Advanced Traffic Control System

James E. Moore II, USC; R. Jayakrishnan and M.G. McNally, UC Irvine;
C. Arthur MacCarley, Cal Poly San Luis Obispo

Anaheim, California, best known for Disneyland, is also the site of Anaheim Stadium and Arrowhead Pond, homes to major league baseball's Angels and the National Hockey League's Mighty Ducks. These major event centers, plus the Anaheim Convention Center, have a combined maximum attendance of 200,000 people. To accommodate this massive influx of visitors, 15,000 hotel/motel rooms are located within a 3 square mile area of the City. Anaheim itself has a population of 300,000, with 150,000 jobs within an area of nearly 50 square miles. On occasion—July Fourth weekend, for example—every room is taken, every ticket is sold, and every parking place is full. Not surprisingly, the city's arterial street system is often subject to irregular periods of elevated demand due to special event traffic. The surface streets have many signalized intersections and short road links, and speeds and travel times are dominated by queue delay at intersections. Ongoing expansion of the Convention Center, construction of a new Disney theme park and hotels, and widening of Interstate 5, all of which are happening simultaneously, exacerbate congestion.

PATH researchers systematically evaluated the performance and effectiveness of Anaheim's traffic management systems from fall 1994 through spring 1998, for the federally-sponsored Anaheim

Advanced Traffic Control System Field Operations Test (FOT). This FOT involved an integrated Advanced Transportation Management System (ATMS) that extends the capabilities of Anaheim's existing arterial traffic management systems. The FOT was conducted by a consortium consisting of the California Department of Transportation (Caltrans), the City of Anaheim, and Odetics, Inc., a private sector provider of advanced technology systems, with the City of Anaheim as the lead agency. The FOT was cost-share funded by the Federal Highway Administration (FHWA) as part of the Intelligent Vehicle Highway System (IVHS) Field Operational Test Program.


The arterial traffic control systems implemented in Anaheim for the FOT include SCOOT (Split, Cycle and Offset Optimizer Technique), an adaptive traffic control system developed in the United Kingdom by Ferranti, GEC, and Siemens under the supervision of the UK's Transportation and Road Research Laboratory (TRRL). SCOOT is employed extensively in Great Britain. A version 3.1 SCOOT system was installed by Siemens for a portion of the City of Anaheim network near Arrowhead Pond and Anaheim Stadium. The FOT tested the SCOOT system against Anaheim's existing Urban Traffic Control System (UTCS), considered state-of-the-art in US transportation management practice.

continued on next page

SCOOT controls the operation of systems of signals rather than isolated intersections. The SCOOT traffic model uses data that varies over time, such as the green and red time of the signal and vehicle-presence measurements, together with data that are fixed for the area under control, such as detector locations, signal stage order, and a variety of other parameters. The SCOOT system collects traffic data from loop detectors embedded in the pavement of intersection approaches. The system uses this data to project conditions in the form of Cyclic Flow Profiles (CFP), simulating traffic characteristics (stops, delays, flows, and queue length) downstream from the detectors. SCOOT's split, cycle, and offset optimizers locally optimize signal timing by searching for improvements in terms of the CFP.

Theoretically, the benefits of SCOOT should be highest when traffic flow is heavy, complex, and unpredictable. In the best case, SCOOT should delay the onset of congestion, as well as providing early relief from it. In unsaturated networks, under certain conditions, SCOOT can prevent congestion by delaying it long enough to permit a short-duration demand overload to be completely overcome by appropriate adjustments in supply.

Figure 1: Anaheim and conventional SCOOT loop detector locations.

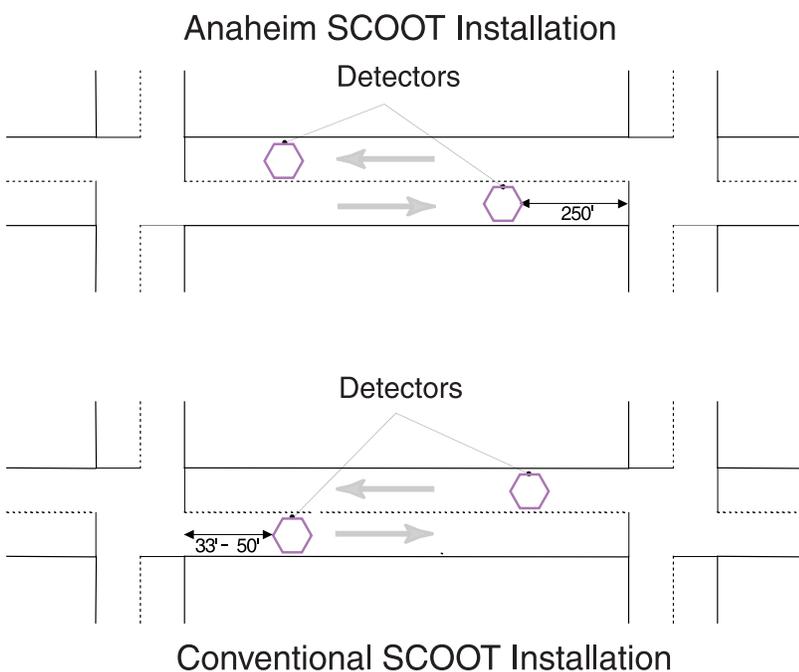

Necessary Conditions for Improvement: SCOOT's Representation of Traffic Flow

The quality of SCOOT implementation and performance is constrained by the system's ability to represent traffic conditions at intersections. If SCOOT can model traffic conditions accurately, it may be able to improve these conditions. If this necessary condition of accurate representation is not met, it is impossible for SCOOT to meet sufficient conditions for improvements. However, meeting necessary conditions without also meeting sufficient conditions is an inconclusive outcome that leaves open the possibility that SCOOT can provide improvements, but did not because of reasons that might be changed.

Anaheim's existing system detectors are located mid-block, upstream of the intersection being controlled. These detectors provide SCOOT with traffic volume counts, but SCOOT is designed to rely on detectors in a different location. The standard configuration is just downstream of the intersection upstream from the intersection being controlled (see Figure 1). Full evaluation of the constraints associated with using nonstandard detector information would require installing upstream loops in a standard SCOOT configuration in addition to existing mid-block detectors, and then comparing SCOOT's operation with different sets of detectors. Such an installation is not feasible: consequently, in this evaluation the effects of using SCOOT are inextricably mixed with the effects of using mid-block detectors.

Field Observations

SCOOT's ability to represent intersection conditions was tested using pairs of traffic data sets. The first data set was provided by downloading message reports directly from the SCOOT system. The second data set consists of empirical field observations, provided by post-processing video tapes of conditions on approaches to intersections subject to SCOOT control. SCOOT system estimates of queue length and queue clearance time were compared with conditions recorded on video. During data collection, a graduate research assistant working as a regular employee in the Anaheim Transportation Management Center (TMC) carefully coordinated collection of the estimated values reported in SCOOT messages with real-time videotapes of traffic conditions recorded via TMC cameras.

A real-time display of the traffic conditions estimated by SCOOT can also be invoked via SCOOT's Node Fine Tuning Display (NFTD). The NFTD command reports the times at which all approaches to a given intersection begin the green phase, shows the queue length when an approach is green, and the associated queue clearance time. Comparing real-time green starts and queue clearance times reported by SCOOT to real-time video images revealed large inconsistencies at some intersections.

Internal Representation Results

We observed that as a result of cumulative communication or other system faults, the SCOOT intersections were unexpectedly being isolated from SCOOT control. Such faults can be cleared manually in most cases, but this requires active intervention on the part of the TMC operator. If faults are actively cleared rather than being permitted to accumulate, the signals involved usually remain under SCOOT control. The number of signals slipping from SCOOT control decreased substantially once the evaluation team demonstrated to Anaheim TMC operators the need to clear faults as they occurred. Unfortunately, these conditions still resulted in substantial data loss for this portion of the evaluation, because SCOOT message data associated with signals subject to cumulative communication faults are meaningless. The conditions reported in such messages diverge from conditions observed via video. Fortunately, some intersections remained under SCOOT control, and data from these intersections still provide statistically significant results. Correlation coefficients between the SCOOT message data and the videotape data were estimated for stops, delays, flows, queue length, and queue clearance times.

If the SCOOT system accurately represents traffic conditions on approaches, then the correlation coefficient between the SCOOT message data and the video data will tend toward unity. In all cases, it is both qualitatively and quantitatively clear that the data provided by the SCOOT messages covaries moderately to strongly with the data extracted from the video tapes. For the Anaheim FOT intersections, the overall correlation coefficient between observed flows and flows reported in SCOOT system messages was estimated at 0.86 (see Figure 2). Coefficients for other traffic indicators are lower, which is to be expected: these

other measures are derived from flow measures, and additional modeling steps are likely to introduce more errors into the values appearing in SCOOT messages. The estimated correlation between observed and SCOOT measures of intersection delay, for example, was 0.65 (see Figure 3). This was the lowest value obtained. Approach delay is also more difficult to compute from video observations than the other quantities. The estimated correlation coefficients for observed stops, queue length, and queue clearance times fall between these values. These are aggregate estimates combining data for three intersections. Estimates for individual intersections have more variance, producing some values above and some below this interval.

continued on next page

Figure 2. Flow volumes on approach per SCOOT interval, all data (Nov. 18, 1997). Correlation coefficient $r = 0.86$.


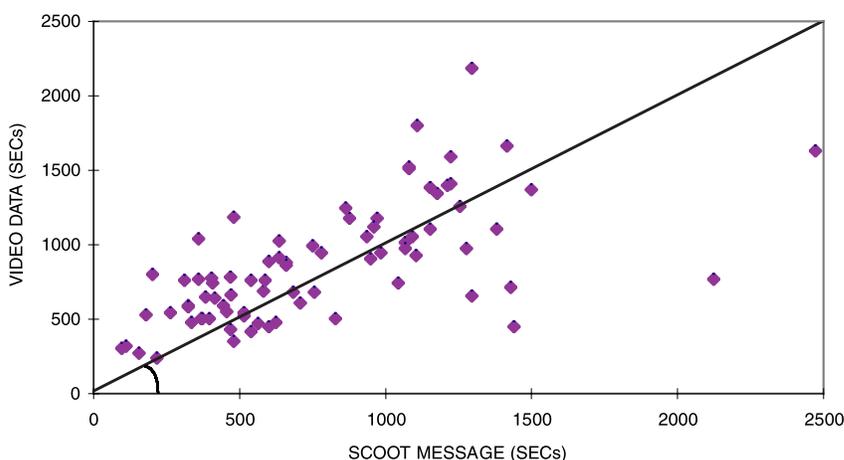


Figure 3. Total vehicle delays on approach per SCOOT Interval, all data (Nov. 18, 1997). Correlation coefficient $r = 0.65$.

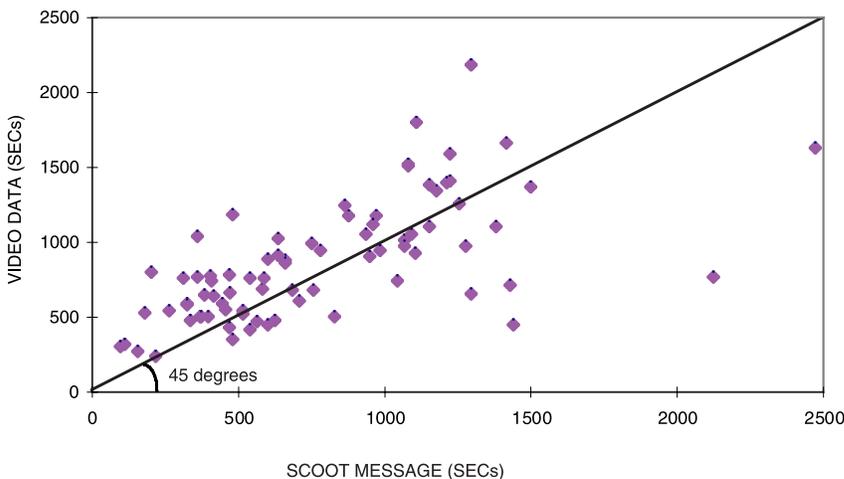

SCOOT Performance in Anaheim

continued from page 3

The estimated correlation coefficients observed in Anaheim are lower than values obtained in other locations where SCOOT has been deployed. A pre-version 2.3 SCOOT installation in Leicester, England, produced a correlation coefficient of 0.93 for flows, subsequently improved to 0.96 (Martin, 1992). The Anaheim correlations are most likely a function of nonstandard detector locations. Improvements could be generated either by changing the locations of detectors, or possibly by adjusting SCOOT's global control settings to try and further compensate for the effect of nonstandard detector locations.

Investigating Sufficient Conditions for Improvement: Traffic Performance under SCOOT

Traffic performance evaluation under SCOOT focuses on delays at SCOOT intersections, as well as running times, stop times, and total times on selected floating car routes in the SCOOT network. A standard "before-after" format was adopted. Measurements were taken of traffic conditions in the PM-peak and evening off-peak both during special events and during non-event traffic conditions.

Delay measurement teams were posted at intersections, and travel-time measurement teams drove floating cars on five routes. Ten observation periods in mid-October 1997 under the pre-existing UTCS control system were selected for the "before" study; ten observation periods in mid-November 1997 under SCOOT were selected for the "after" study.

Resource limitations prevented full-time measurements at all intersections. Intersection delays were calculated by counting the stopped cars at small sample intervals, accumulating totals, and multiplying by the sample interval. The delays were not disaggregated for each turning movement. Routes for the floating-car travel time studies were selected to obtain a reasonable coverage of the network with sufficient turning movements to capture delay patterns. Observed times were aggregated and averaged for each route for each observation day.

Traffic Performance Results

Results provided by the intersection delay analysis include the following:

- The SCOOT system generally performed better under off-peak conditions than under peak conditions. The relative performance of SCOOT in comparison to the baseline system improved under special-event conditions compared to nonevent conditions for low volume intersections, although the reverse occurred for some high volume intersections. SCOOT performed very well at two intersections subject to heavy egress traffic from the special event locations, pointing to SCOOT's ability to make adaptive adjustments.

- The SCOOT system produced lower intersection delays in some cases, and higher delays in others compared to the baseline system. SCOOT increased delays more frequently than it decreased delays, but there is insufficient evidence to show that this SCOOT installation performs significantly worse or better than the baseline system during peak-periods. In cases where SCOOT performed worse than the baseline system with respect to intersection delays, the increase in delay was rarely more than 10 percent. In cases where SCOOT performed better, improvements were normally less than 5 percent.

- SCOOT and baseline system delays are comparable in most cases. In the cases where SCOOT performed worst, special circumstances associated with the project contributed to this result. These circumstances include nonideal parameter settings, and the inclusion of low-volume intersections that probably should not have been subject to SCOOT control. Forcing a common signal cycle length that is not appropriate for an intersection can cause excessive delays.

- The SCOOT system, despite the substandard implementation and ongoing communication faults, did not produce any instances of unacceptably higher intersection delays, and did not cause any major problems in the system. SCOOT reduced delays at some intersections.

Results derived from the travel-time analysis include the following:

- Travel times on selected routes showed the effect of directional settings in SCOOT. Opposing directions on a route that had different travel times under the baseline system showed similar travel times under SCOOT. Another route showed the opposite.

- Route travel times under SCOOT showed reductions of less than 10 percent in some cases, and increases of less than 15 percent in others. On the more circuitous, longer routes covering more of the network, SCOOT showed travel time reductions of as much as 2 percent, and increases of as much as 6 percent. SCOOT's performance relative to the baseline system was better under non-event conditions than under special event conditions.

Conclusions

SCOOT can operate in a network with nonstandard detectorization, and can control traffic without causing substantial increases in intersection delays and route travel times. While SCOOT was implemented in Anaheim with some degree of success, it did not show the level of benefits demonstrated by standard SCOOT implementations around the world. This is understandable, considering that the baseline system SCOOT performance was compared with is considered state-of-the-art in US practice. Technical and institutional problems also limited expected performance. Siemens and the City spent minimal time fine-tuning the SCOOT parameters, training for City TMC staff was incomplete, communication and controller systems were of lower quality than anticipated, and there was no acceptance test prior to evaluation of the system. These outcomes were driven by responses to project deadlines. Problems were exacerbated by staff changes affecting project management, and delays due to contractual issues.

In summary, SCOOT's ability to at least partially model traffic conditions based on non-standard detector locations, the fact that traffic conditions remained acceptable under SCOOT, and that no serious traffic problems arose, all suggest that SCOOT is a system worth pursuing in Anaheim and other US cities. Siemens returned to Anaheim following the PATH evaluation to address problems identified during the course of the evaluation. SCOOT remains in current use in selected areas in the City of Anaheim, with plans for system expansion.

Acknowledgments

USC graduate research assistants Seongkil Cho and Hsi-Hwa Hu, and UCI graduate student researchers Steven P. Mattingly (now Assistant Professor of Civil Engineering at the University of Alaska) and



Anaheim Transportation Management Center.

James Roldan made significant contributions to the field work and analysis needed to complete this project. The student investigators persisted in reporting to their disbelieving faculty supervisors that "something is wrong in the field," thereby salvaging the evaluation. Richard Macaluso of Caltrans and Frank Cechini of FHWA demonstrated astounding patience during the five years needed to complete this FOT and evaluation.

References

- Gillam, W. J., and R. A. Withill. 1990. Urban traffic control developments in Leicestershire. *Journal of the Institution of Highways and Transportation (UK)*. October, 1990.
- Hunt P. B., D. I. Robertson, R. D. Bretherton, and R. I. Winton. 1981. SCOOT - A Traffic Responsive Method of Coordinating Signals. TRRL report LR1014, Crowthorne.
- Martin, P. 1992. Urban Traffic Movement Prediction From Automatic Flow Detection. Ph. D. diss., School of Engineering, University of Nottingham, England.
- Martin, P. T., and S. L. M. Hockaday. 1995. SCOOT - An Update. *ITE Journal*, 65(1), 44-48.
- McNally, M. G., et al. 1999. Evaluation of the Anaheim Advanced Traffic Control System Field Operational Test: Final Report Task B; Assessment of Institutional Issues. University of California, Berkeley: Institute of Transportation Studies, California PATH Program. PATH Research Report UCB-ITS-PRR-99-27, July 1999.

References continued on page 9

Intelligent Surveillance Using Inductive Vehicle S

Carlos Sun, PATH/Rowan University

An excellent opportunity exists to squeeze out more detailed and accurate information from the current detector infrastructure.

Even as new exciting technologies are being developed for transportation applications and new Intelligent Transportation Systems (ITS) are being tested and implemented, the need for more detailed and accurate transportation data grows apace. Researchers are exploring the use of various new forms of detectors and surveillance systems. These detectors include infrared, microwave, ultrasonic, acoustic, Automatic Vehicle Identification (AVI), piezo-electric, magnetic, Global Positioning System (GPS)/cellular modem, and video image processing devices. However, an excellent opportunity exists to squeeze out more detailed and accurate information from the current detector infrastructure or inductive loops. One way this is accomplished is by using inductive signatures collected from existing loops.

Previously, inductive loop detector cards only operated in a pulse or a presence mode, producing a digital output. However, detector manufacturers are increasingly producing detectors that have the capability to output a vehicle inductive signature through a serial port on the detector card. This inductive signature is the result of the net decrease in detector inductance when a vehicle's metallic mass passes over the magnetic field generated by the inductive loop. (Research work cited in the References below exemplifies the use of inductive signatures.)

One useful result of inductive signature analysis is the derivation of vehicle classification data. Vehicle classification is the process of separating vehicles according to different predefined classes. Vehicle classification information can be used in many transportation applications including road maintenance, emissions/pollution estimation, traffic modeling and simulation, traffic safety, and toll setting. Two different systems were developed for classifying vehicle signatures. One system is based on the self-clusterization approach and uses a Self-Organizing Feature Map (SOFM). A SOFM is an artificial neural network that forms clusters of neurons which reflect similarities in the input vector. The weights of the neurons actually become similar to average class signatures. Although the SOFM was trained by using a very small dataset of twenty-six

vehicle signatures (feature vectors), it was able to classify 300 test vehicles with an accuracy of 85 percent. The classes of vehicles that were identified were car, Sport Utility Vehicle (SUV), limousine, bus, truck, car towing trailer, and semi-trailer truck.

A second vehicle classification system uses a heuristic discriminant algorithm for classification and multi-objective optimization for training the heuristic algorithm. A heuristic discriminant algorithm is a hierarchical combination of discriminant functions, similar to a decision tree, that separates the vehicle pattern space in a piece-wise linear fashion. Feature vectors obtained by processing inductive signatures were used as inputs into the algorithms. The use of feature vectors reduced data storage and communications requirements, and enabled a hierarchical approach for classification. The figures opposite illustrate some examples of feature vectors including the electronic length, inductive magnitude, energy content, signature variance, skewness, kurtosis, Discrete Fourier Transform (DFT) coefficients, and first and second order gradients of the signature. Three different heuristic algorithms were developed for separating vehicle signatures into seven classes. The three algorithms yielded encouraging results of 81%-91% overall classification rates using different test datasets. The results from both vehicle classification systems demonstrate the potential of collecting network-wide vehicle classification data from inductive loops. The availability of vehicle classification data helps to improve traffic surveillance and paints a more detailed picture of dynamic traffic networks.

Another benefit of using vehicle inductive signatures is the derivation of section measures of traffic system performance. These measures include section travel time, section density, lane change, and even dynamic origin/destination demand (see Intellimotion 6.2, available at <http://www.path.berkeley.edu/PATH/Intellimotion>). Origin/destination demands can be derived from unique vehicles that are tracked over multiple sections. In order to derive section measures, individual vehicles are first reidentified. The vehicle reidentification prob-

Signatures

lem is the task of matching a vehicle signature detected at one location with the signature from the same vehicle detected at another location. The vehicle reidentification problem is formulated and solved as a lexicographic optimization problem. The lexicographic formulation and solution combines lexicographic goal programming, classification, and Bayesian analysis techniques. Results from testing the lexicographic method using freeway inductive loop data demonstrate that section density and travel time can be derived with less than 2 percent error. These tests also show that robust results can be obtained under different traffic flow conditions (Sun et al. 1999). Implementation of this approach using conventional surveillance infrastructure permits the development of new algorithms for ATMIS (Advanced Transportation Management and Information Systems).


In addition to deriving data that were previously not accessible to most traffic engineers and researchers, the use of signature analysis can also produce more accurate measurements of point speed. The measurement of speed is important because travel time is the reciprocal of speed and is a useful measure of road congestion and traffic system performance. Travel time is also a basic traffic variable that is used in many ITS strategies such as route guidance, incident detection, and traveler information systems. Previously, speeds were mainly acquired from double inductive loops configured as speed traps, since single loop speed estimates based on assumptions of constant vehicle length were inaccurate. However, more accurate measurements of speed can now be derived with single loops by utilizing inductive signatures of vehicles. An algorithm using signal processing and statistical methods was developed to extract speeds from inductive signature slew rates. The results show that the proposed algorithm produced 30 percent less error than conventional single loop estimation methods using arterial test data (Sun and Ritchie 1999). The results also show that the algorithm is robust under different traffic conditions and is transferable across surveillance sites without the

continued on page 9


An example of a vehicle signature along with the video ground truth and feature vectors that were derived for use in various algorithms. By using signatures, transportation data that are difficult to acquire – such as travel time, density, lane change, single loop speed, partial dynamic origin/destination demand, and vehicle classification data – can be obtained.



Video Groundtruth.

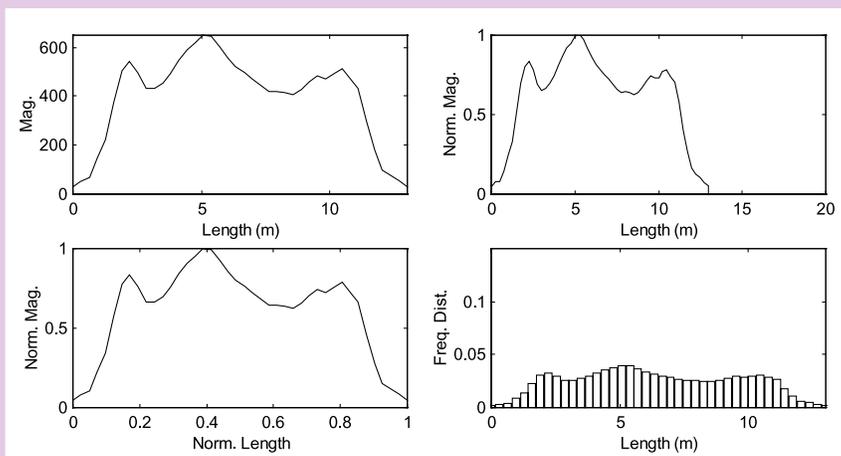


Transformed signatures.

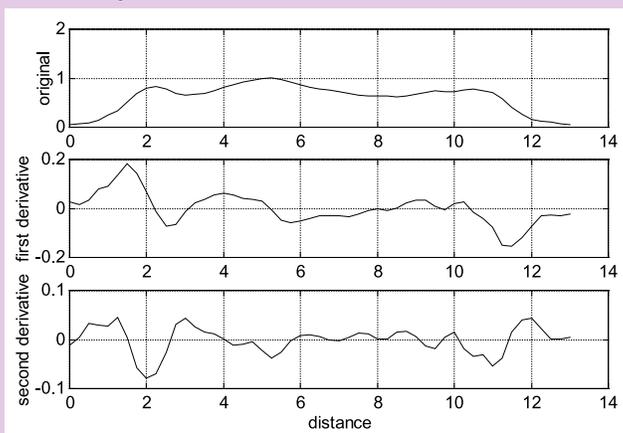

Signature gradients (first and second derivatives).

Fourier transform.

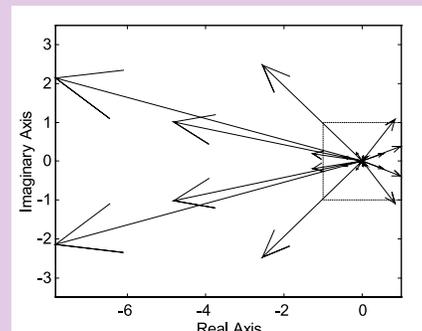



PATH on Paper

An Updated List of Recent PATH Sponsored Research Publications

PATH publications (which include research reports, working papers, technical memoranda, and technical notes) can be obtained from:

Institute of
Transportation Studies
Publications Office
University of California
109 McLaughlin Hall
Berkeley, CA 94720-1720

510-642-3558,
FAX: 510-642-1246

[http://www.its.berkeley.edu/
publications.html](http://www.its.berkeley.edu/publications.html)

A searchable database of
PATH publications is
available via the PATH World
Wide Web site at:
<http://www.path.berkeley.edu>

Preliminary Findings for a Lane-Keeping and Collision-Warning Driver Interface for Snowplow Operations, Aaron Steinfeld, Han-Shue Tan, May 1999, \$10, UCB-ITS-PWP-99-6*

Event-based ATIS: Practical Implementation and Evaluation of Optimized Strategies (Part I), R. Jayakrishnan, Wei K. Tsai, Jun-Seok Oh, Jeffrey Adler, June 1999, \$15, UCB-ITS-PWP-99-7

High Occupancy Vehicle/Toll Lanes: How Do They Operate and Where Do They Make Sense?, Joy Dahlgren, June 1999, \$10, UCB-ITS-PWP-99-8*

Some Aspects of the Market for Broadcast Traffic Information, Matthew Malchow, Adib Kanafani, June 1999, \$5, UCB-ITS-PWP-99-9

Simulation and Animation Tools for Analysis of Vehicle Collision: SMAC (Simulation Model of Automobile Collisions) and Carmma (Simulation Animations), Bruce Hongola, Ching-Yao Chan, July 1999, \$5, UCB-ITS-PWP-99-10*

A Network Layer for Intelligent Vehicle Highway Systems, Farokh Eskafi, Marco Zandonadi, July 1999, \$5, UCB-ITS-PWP-99-11*

Southern California Intelligent Transportation System Priority Corridor Action Summary, Thomas Horan, September 1999, \$10, UCB-ITS-PWP-99-12*

User's Manual for Transit ITS Simulator (TRAN-ITS), Maged Dessouky, Lei Zhang, Ajay Singh, Randolph Hall, September 1999, \$10, UCB-ITS-PWP-99-13

Individual Vehicle Speed Estimation Using Single Loop Inductive Waveforms, Carlos Sun, Stephen G. Ritchie, October 1999, \$10, UCB-ITS-PWP-99-14*

PATH ATMIS State of the Research Annual Report Fiscal Year 1998 / 1999, Robert Tam, October 1999, \$10, UCB-ITS-PWP-99-15*

Validation of the Incremental Transfer Model, Tim Lawson, Wei-Hua Lin, Michael Cassidy, October 1999, \$10, UCB-ITS-PWP-99-16

Identifying the Onset of Congestion Rapidly with Existing Traffic Detectors, Benjamin Coifman, November 1999, \$5, UCB-ITS-PWP-99-17*

Vehicle Reidentification and Travel Measurement on Congested Freeways, Benjamin Coifman, November 1999, \$5, UCB-ITS-PWP-99-18*

Advanced Coordinated Traffic Responsive Ramp Metering Strategies, Klaus Bogenberger, Adolf D. May, November 1999, \$15, UCB-ITS-PWP-99-19*

Identification and Prioritization of Environmentally Beneficial Intelligent Transportation Technologies: Modeling Effort, Troy Young, Daniel Sperling, Susan Shaheen, December 1999, \$10, UCB-ITS-PWP-99-20*

Visualizing Loop Detector Data, Xiaoyan Zhang, John Rice, December 1999, \$5, UCB-ITS-PWP-99-21*

Lateral Control of Heavy Duty Vehicles for Automated Highway System: Experimental Study on a Tractor Semi-trailer, Pushkar Hingwe, Jeng-Yu Wang, Meihua Tai, Masayoshi Tomizuka, January 2000, \$10, UCB-ITS-PWP-2000-1*

Towards an Accessible City: Removing Functional Barriers to Independent Travel for Blind and Vision Impaired Residents and Visitors, Reginald G. Golledge, James R. Marston, September 1999, \$10, UCB-ITS-PRR-99-33*

Regulation Layer Software Integration, Akash R. Deshpande, November 1999, \$50, UCB-ITS-PRR-99-34

The Access Control Problem on Capacitated FIFO Networks with Unique O-D Paths is Hard, Alan L. Elera, Carlos F. Daganzo, David J. Lovell, November 1999, \$5, UCB-ITS-PRR-99-35

Safety and Capacity Analysis of Automated and Manual Highway Systems, Jason Carbaugh, Datta N. Godbole, Raja Sengupta, November 1999, \$10, UCB-ITS-PRR-99-36*

Development of Binocular Stereopsis for Vehicle Lateral Control, Longitudinal Control and Obstacle Detection, Jitendra Malik, Jana Kosecka, Camillo J. Taylor, Philip McLaughlan, November 1999, \$10, UCB-ITS-PRR-99-37*

Evaluation of ITS Technology for Bus Transit Systems, Randolph Hall, Maged Dessouky, Lei Zhang, Ajay Singh, Vishal Patel, November 1999, \$20, UCB-ITS-PRR-99-38

continued on page 10

*Available online at: [http://www.path.berkeley.edu/
Publications/PATH/index.html](http://www.path.berkeley.edu/Publications/PATH/index.html)

Intelligent Surveillance Using Vehicle Signatures

continued from page 7

need for recalibration. The use of the extensive single loop surveillance infrastructure is a cost-effective way of obtaining more accurate network-wide travel time information.

In conclusion, the use of inductive signatures offers transportation systems new ways of collecting important real-time data using existing infrastructure. As newer detection technologies mature and become economically feasible, there will be exciting opportunities to explore detector data fusion. The existing inductive signature algorithms for classification, reidentification, and speed measurement can be augmented by other detector technologies. Since different detector technologies produce different feature vectors, pattern recognition algorithms can be improved by fusing data from different detectors. For example, the accuracy of inductive signature algorithms for vehicle reidentification can be improved by adding the chroma feature vector from video detectors, as well as vehicle width information from infrared detectors. Such advances in transportation surveillance will benefit many areas of transportation, and assist in the development and implementation of Intelligent Transportation Systems.

References

Böhnke, P., and E. Pfannerstill. 1986. A System for the Automatic Detection of Traffic Situations. *ITE Journal*, Vol. 56.

Kühne, R. D. 1991. Freeway Control Using a Dynamic Traffic Flow Model and Vehicle Reidentification Techniques. *Transportation Research Record*, 1320, pp. 251-259.

Kühne, R. D., and S. Immes. 1993. Freeway Control Systems for Using Section-Related Traffic Variable Detection. Seattle, Washington: Pacific Rim TransTech Conference, July 25-28, 1993.

Pursula, M. and P. Pikkarainen. 1994. A Neural Network Approach to Vehicle Classification with Double Induction Loops. In *Proceedings of the 17th ARRB Conference*. Part 4, pps. 29-44.

Sun, C., and S. Ritchie. 1999. Individual Vehicle Speed Estimation Using Single Loop Inductive Waveforms. *American Society of Civil Engineers, Journal of Transportation Engineering*, Vol. 125. No. 6. Nov/Dec.

Sun, C., S. Ritchie, K. Tsai, and R. Jayakrishnan. 1999. Use of Vehicle Signature Analysis and Lexicographic Optimization for Vehicle Reidentification on Freeways. *Transportation Research, Part C*. Vol. 7C, No. 4, August.

Sun, C., S. Ritchie, and W. Tsai. 1998. Algorithm Development for Derivation of Section-Related Measures of Traffic System Performance. *Transportation Research Record*, 1643, pps. 171-180. ■

SCOOT Performance

continued from page 5

Moore II, J. E. et al. 1999. Evaluation of the Anaheim Advanced Traffic Control System Field Operational Test: Introduction and Task A: Evaluation of SCOOT Performance. University of California, Berkeley: Institute of Transportation Studies, California PATH Program. PATH Research Report UCB-ITS-PRR-99-26, July 1999.

USDOT. 1993. Intelligent Vehicle Highway Systems Operational Test Evaluation Guidelines. DOT Document HTV-20. Prepared by MITRE Corporation. ■



Anaheim Transportation Management Center Traffic Engineer John Thai changes message sign on "Smart Street," Katella Avenue.





PATH Presentations

Recent and Upcoming Presentations of PATH Sponsored Research

TRB 2000, Transportation Research Board 79th Annual Meeting, Washington D.C., January 9-13, 2000.

- Pat Conroy, "Role of ATIS in the Personalized Public Transportation Vision".
- Genevieve Giuliano, "An Integrated Fare System Using Smart Cards: Results from a Field Operational Test".
- Joy Dahlgren, "High-Occupancy/Toll Lanes: How Do They Operate and Where Do They Make Sense?".
- Steven Shladover, "Progressive Deployment Steps Leading Toward an Automated Highway System (AHS)".
- Jim Misener et al. "Examination of Critical Factors and the Emergence of a Cognitive Car Following Driver Model for Rear-End Crashes with a Stopped Lead Vehicle".
- Mark Miller, "Passenger Intermodal Operations and Services: A Synthesis of the Challenges and Opportunities for Successful Implementation".
- Youngbin Yim, "Electronic Media and their Effects on Travel Choice".
- Youngbin Yim, "Telecommunications and Travel Behavior: Would Cellular Communications Generate More Trips?"
- Asad Khattak, Youngbin Yim, Linda Stalker, "Willingness to Pay for Travel Information: Combining Revealed and Stated Preferences with a Random Effects Negative Binomial Regression Model".
- Youngbin Yim, "Advanced Traveler Information Systems Part I: Prospects On Emerging Technologies In Europe, Japan and the U.S." (presiding).
- Youngbin Yim, "Advanced Traveler Information Systems Part II: A Perspective From Asian, European and North American Experience", (presiding).
- Patrick Conroy, "Impact of Emerging ATIS Technologies on Transportation Practice and Traffic Management".
- Youngbin Yim, "Lessons Learned from the ATIS Experience".

- Jaimyoung Kwon (presenting), Benjamin A. Coifman, and Peter J. Bickel, "Day-to-Day Travel Time Trends and Travel Time Prediction From Loop Detector Data".
- Benjamin A. Coifman, "Improved Data Measurement Using Existing Loop Detectors".
- Karen Smilowitz, Carlos Daganzo, "Experimental Verification of Time-Dependent Accumulation Predictions".
- Jih-Bing Sheu, Stephen G. Ritchie, "A Sequential Detection Approach for Real-Time Freeway Incident Detection and Characterization".
- Carlos Sun, Stephen G. Ritchie, "Heuristic Vehicle Classification Using Inductive Signatures on Freeways".

6th World Congress on Intelligent Transport Systems, Toronto, Ontario, Canada, November 8-12, 1999.

- Wei-Bin Zhang, "Implementing AVCSS Technologies for Highway Maintenance Operations".

ITS America 10th Annual Meeting, Boston, Massachusetts, May 1-4, 2000

- Han-Shue Tan, Aaron Steinfeld, "The Importance of Gain in Driver Assisted Lateral Control".

JCIS Conference, New Jersey, February 2000.

- Youngbin Yim, "Communications Technology and Its Influence on Travel Decisions".

INFORMS Fall Conference, Philadelphia, Pennsylvania, November 7-10, 1999.

- Carlos Sun, S. Ritchie, R. Jayakrishnan, "Detection of Traffic and Section-Based Measures".
- Carlos Sun, J. Porway, R. Jayakrishnan, "Analysis of Sensitivity of Origin-Destination Demand Estimation Algorithms".

PATH on Paper

continued from page 8

Evaluation of the OCTA Transit Probe System, Randolph W. Hall, Nilesh Vyas, Chintan Shyani, Vikas Sabnani, Simit Khetani, November 1999, \$20, UCB-ITS-PRR-99-39

A Parametric Study of Platoon Dynamics and Robust H_{∞} Controller Design, Pahngroc Oh, Andy Packard, Benson H. Tongue, November 1999, \$10, UCB-ITS-PRR-99-40

Dynamics in Behavioral Adaptation to a Transportation Innovation: A Case Study of Carlink-A Smart Carsharing System, Susan A. Shaheen, December 1999, \$50, UCB-ITS-PRR-99-41*

Implementation of Advanced Techniques for Automated Freeway Incident Detection, Baher Abdulhai, Stephen G. Ritchie, Mahadevan Iyer, December 1999, \$10, UCB-ITS-PRR-99-42*

Empirical Comparison of Travel Time Estimation Methods, Xiaoyan Zhang, John Rice, Peter Bickel, December 1999, \$10, UCB-ITS-PRR-99-43*

Safety and Throughput Analysis of Automated Highway Systems, Datta N. Godbole, John Lygeros, January 2000, \$10, UCB-ITS-PRR-2000-1*

Conditions for Safe Deceleration of Strings of Vehicles, John Lygeros, Nancy Lynch, January 2000, \$10, UCB-ITS-PRR-2000-2*

*Available online at: <http://www.path.berkeley.edu/Publications/PATH/index.html>

PATH Database Developments

Seyem Petrites, PATH Database Manager

Exciting things do happen in libraries, even in the back rooms where computers abound, cataloguers devour books, and databases are maintained. We'd like to share with you some recent developments regarding the California PATH Database.

In January, we celebrated two years of support from the Transportation Research Board (TRB) in providing the PATH Database Internet web site. The PATH Database will soon also be mounted on TRB's Internet version of the Transportation Research Information Services (TRIS) Database. (TRIS itself will be reaching a significant milestone in the year 2000 when it becomes available through the National Transportation Library's (NTL) web site.)

Information is useful only if it is accessible. Thanks to the concerns of Steven Shladover, PATH Database entries now include all authors listed in the publication. We are also pursuing a retrospective search of all PATH publications, ensuring full author entries for papers and reports.

Please bookmark these URLs:

For the California PATH Bibliographic Database:
<http://www.nas.edu/trb/about/path1.html>

For the New Acquisitions in ITS list:
<http://www.lib.berkeley.edu/ITSL/newbooks.html>

The PATH Database grows at a rate of about 300 records a month. Our core information comes from monographs, technical reports, conference proceedings, and journal articles. We also track newspaper articles and ITS-related web sites. One of our



*PATH Database Manager
Seyem Petrites with
PATH Database librarian
Mike Kleiber.*

goals is to obtain proceedings from the major ITS-related domestic and international conferences. However, these publications can be very costly. If those of you attending conferences have a copy of the proceedings, and would like to donate them to the Library, we would heartily welcome them.

The PATH Library staff encourage comments and concerns regarding our services and products. We need to hear from you in order to fulfill our mission. Please write, fax, or call us at:

Harmer E. Davis Transportation Library
Institute of Transportation Studies
412 McLaughlin Hall
University of California
Berkeley, CA 94720-1720
tel: 510-642-9168
fax: 510-642-9160
e-mail: spetrite@library.berkeley.edu
<http://www.lib.berkeley.edu/ITSL/>

Get on the Mailing List!

FAX, mail, or e-mail us the following information for a free subscription to *Intellimotion*:

Name & Title
Address
Phone and FAX
E-mail address
Company, type of business
Primary area of interest in ITS

Please mention the *Intellimotion* mailing list. See page 12 for our address and FAX number.

Note to Librarians:

Intellimotion for 1999 comprises three volumes: 8.1, 8.2, and 8.3. The next issue, the first of the year 2000, will be number 9.1.

VZ-41
University of California

California PATH Publications
Richmond Field Station, Bldg. 452
Berkeley, CA 94720-3580

Address Service Requested

NON-PROFIT ORGANIZATION
U.S. POSTAGE PAID
UNIVERSITY OF CALIFORNIA

Science Center Shows PATH Video



Missouri's St. Louis Science Center is including PATH Multimedia Developer Jay Sullivan's *NAHSC Demo '97 California PATH Platooning Demo* video in a major new gallery called Cyberville opening January 29, 2000. The PATH video, which depicts the operation of PATH's eight-Buick automated platoon demonstration at the National Automated Highway Systems Consortium Technical Feasibility Demonstration, held on Interstate 15 in San Diego, California, during August 1997, was selected because it provides an interesting and understandable explanation of car sensors.

Valerie Carroll, Cyberville's Project Coordinator, says "We are very excited at the prospect of using the NAHSC Demo '97 video. It will be part of a video loop on car sensors that will show the kinds of sensors used in cars in a fun, accessible, and educational way. We would like permission to use it in perpetuity."

The St. Louis Science Center (www.slsc.org) is a free educational institution with approximately 1.5 million visitors a year, and a wide regional impact. Its 11 galleries focus on four key areas of science: space, ecology, technology, and anthropology. Cyberville's 6000 sq ft gallery focuses on information technologies, broadly defined, and their impact on the lives of today's citizens. ■

Intellimotion

Intellimotion is a quarterly newsletter edited and designed by the California PATH Publications Department.

Publications Manager
Editor
Art Director
Multimedia Specialist

Bill Stone
Gerald Stone
Esther Kerkmann
Jay Sullivan

For more information or comments about this newsletter, please write, call, fax, or e-mail the address below.

PATH Publications
1357 South 46th Street, Bldg. 452
Richmond, CA 94804-4603
Tel: 510/231-9495 FAX: 510/231-9565
e-mail: bstone@uclink2.berkeley.edu
<http://www.path.berkeley.edu>

Graphics and photography by Gerald Stone.

CALIFORNIA
PATH

Partners for Advanced Transit and Highways

Director Karl Hedrick
Deputy Director, AVCSS Program Manager Steve Shladover
ATMIS Program Manager Pat Conroy
Caltrans Management Liaison Greg Larson

Primary funding provided by:



©1999 by California PATH. All rights reserved. Unless permission is granted, this material shall not be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise.

ISSN-1061-4311



Printed on recycled paper

